



# HP M255 & M155 Dismounting and mounting chip



## HP-M255&M155

Dismounting and Mounting Chip Instruction

NO.255-2

**NOTE: For better printing performance, please use the chip mounting the compatible cartridge to run one life**


**Step 1 Dismount the chip from used genuine cartridge.**



Used Genuine Cartridge

1. Take out the used cartridge from printer; Take the tweezers from the box which load new compatible cartridge.


2. Use tweezers end to insert the gap in front of the chip, rotate the tweezers to break the small plastic.

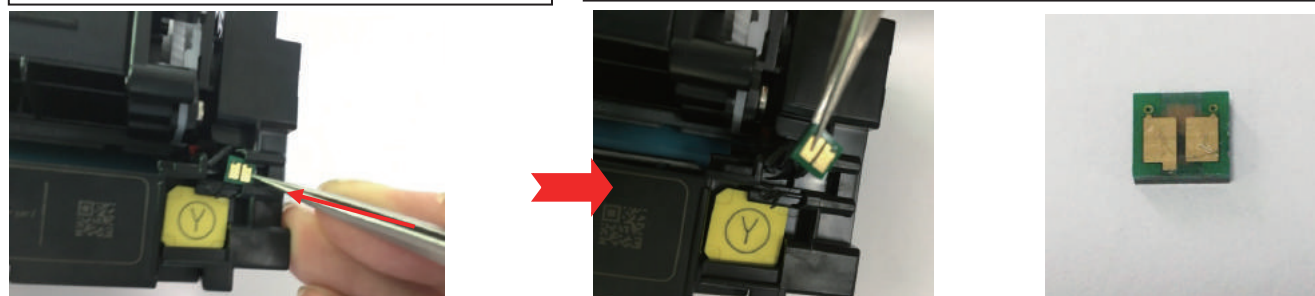

3. Push the chip out slightly as the arrow shows.


**NOTE: PAY MORE ATTENTION TO GET READY FOR THE CHIP DIRECTION AND COLORS FOR FUTURE USE.**

**Step 2 Mount the chip onto the new compatible cartridge.**

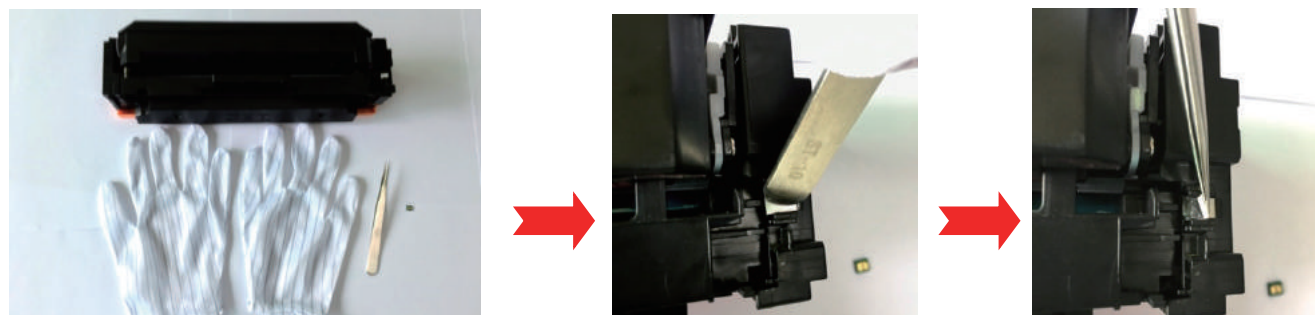

1. Prepare the new cartridge, chip, anti-static gloves and tweezers.

2. Make the cartridge face up, use tweezers end to press the double-faced adhesive tape for several times, then use the tweezers top to tear up the upper paper of the tape.

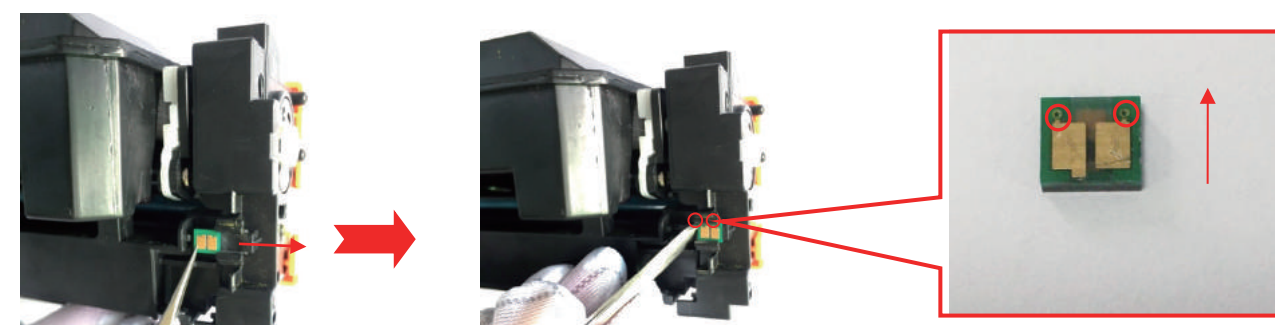


4. Use tweezers to take the chip and push it into the groove all the way.

**NOTE: MAKE THE TWO CIRCLES OF CHIP OUTSIDE MOUNT; MAKE CHIP MOUNT ONTO RIGHT COLOR CARTRIDGE.**

**Step 3 Put the cartridges into machine.**




Put the cartridges into machine properly according to the colors.

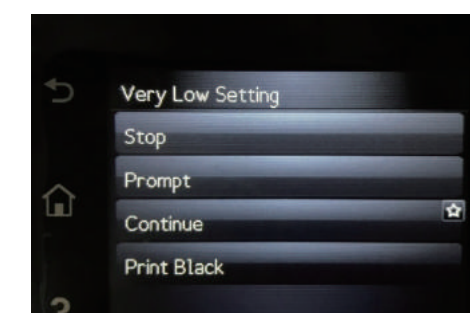


Follow the on-screen instructions to start a new printing job. Main Menu—Setup—Supply Settings—Black/Color Cartridge—Very Low Setting—Continue.

**NOTE: YOU MAY SKIP THE STEPS IF A MESSAGE THAT REPLACE THE TONER CARTRIDGE IS NOT DISPLAYED.**

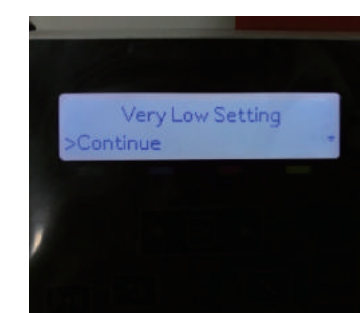


**Step 4 Calibrate the printer for better print performance.**



- ① Touch Screen Control Panel: click Setup, choose System Setup—Print Quality—Color Calibration—Calibrate Now.
- ② LCD Control Panel: Press OK to homepage—System Setup—Print Quality—Color Calibration—Calibrate Now—OK.
- ③ No Control Panel: Follow the steps below to calibrate.

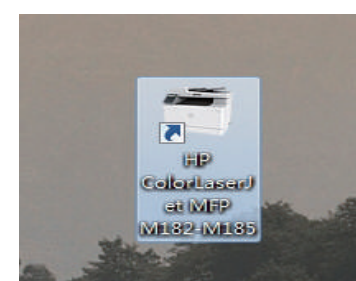

(1) Double click the printer icon on the desktop.

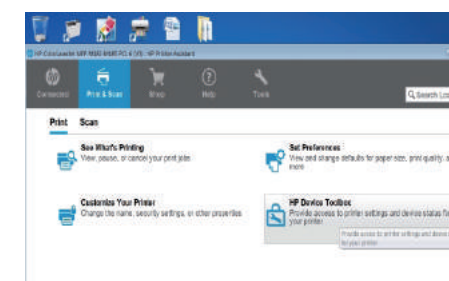

(2) Go to "HP Device Toolbox", then click "System"—"Print Quality".

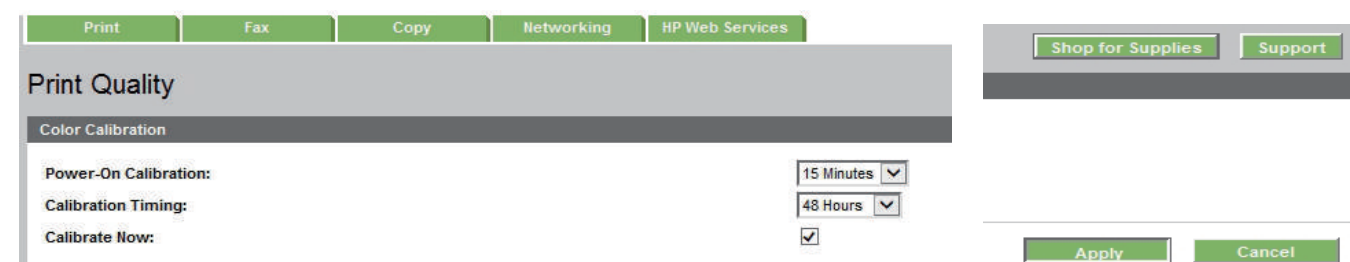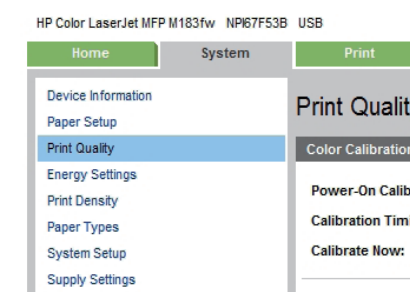

(3) Tick "Calibrate Now", then choose "Apply".

- ④ Power off and on for 15 minutes, printer can do calibration job by itself.